

### VANDAL RESISTANT DISABLED REFUGE EVCS OUTSTATION

Large vandal resistant call button  
With LED illumination indicating call progress

Integral speaker and microphone

Independently adjustable audio output level and gain

Tough, stainless steel, construction

Mounts in flush or surface mild steel back box

Anti-tamper fixings available

Compatible with standard, compact and combined Folknoll EVCS

Designed for public use

## DISABLED REFUGE EVCS

Folknoll's vandal resistant, **BS 5839-9** compatible, disabled refuge EVCS offers vandal resistant solutions for **MUSEUMS, RAILWAY STATIONS, HOTELS** and other **PUBLIC SPACES**. Our great range of outstations, master stations and control equipment, enables us to construct systems to suit your requirements. All of our products can be customised with photoluminescent, Braille, tactile and multilingual annotation. We can even combine our disabled refuge EVCS with fire telephones, emergency assistance and other building alarms to provide **COST-EFFECTIVE** solutions for smaller sites.

## OUTSTATIONS

Disabled refuge EVCS outstations are installed in refuge areas to enable users to call for assistance in the event of an emergency.

## RA7700.30/35: OUTSTATION STAINLESS

Our RA7700.30/35 is a vandal resistant, stainless steel, outstation, with a large, vandal resistant, call button, with LED illumination indicating call progress. The speaker volume and microphone gain are independently adjustable to suit the operating environment, with a maximum output of 80dB for noisy areas. The standard faceplate is made from brushed finish stainless steel and annotated in black with the words '**PRESS ONCE TO CALL**' alternative finishes and annotation are available on request.

## MOUNTING

The unit is supplied with a flush or surface mount mild steel back box. Anti-tamper fixings are available on request.

## POWER

This device is usually line powered from a standard system controller or a compact system master.


## APPLICATION

This outstation is suitable for use with compact, combined and standard Folknoll Disabled Refuge EVC systems.

### SPECIFICATIONS

Call button:	Large, vandal resistant push button, with LED illumination indicating call progress
Audio output:	Adjustable (max: 80dB)
Power:	24Vdc, usually line powered derived from the battery-backed, system PSU
Faceplate:	Stainless steel, brushed finish, black annotation
Dimensions:	Width: 130mm, height: 190mm (approx.)
Mounting. RA 7700.30:	Mild steel surface mount back box, painted, black
Mounting. RA 7700.55:	Mild steel flush mount back box

### CONNECTIONS

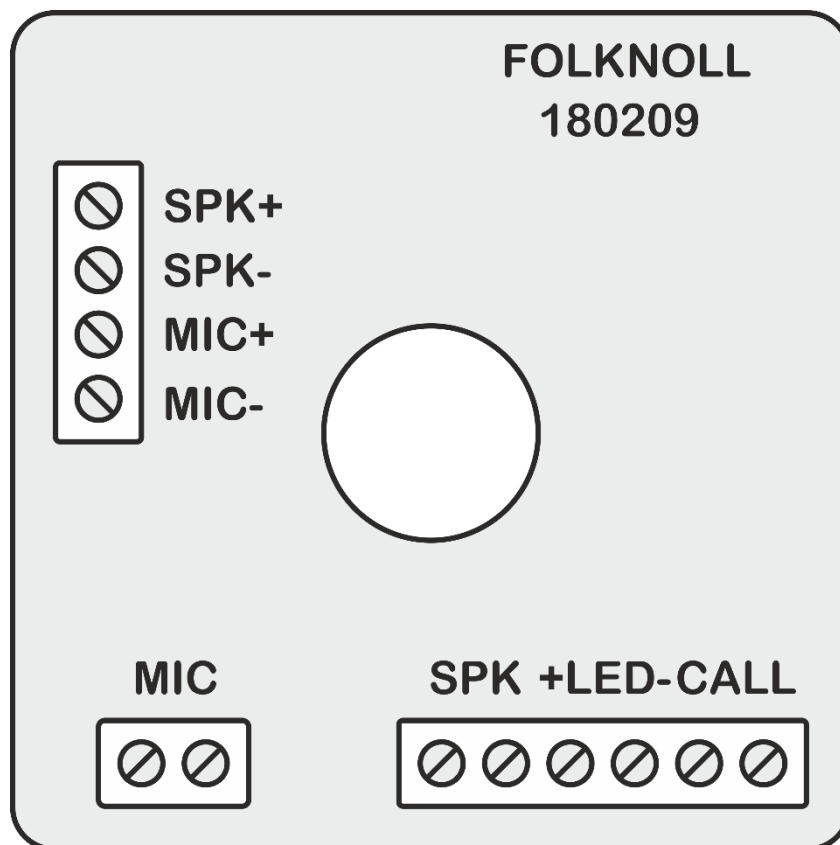

### ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual annotation, custom engraving and special finishes for all of our equipment.

### GET IN TOUCH

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.