



BRIGHT GREEN REFUGE OUTSTATION

Photoluminescent annotation

Braille annotation

Optional for integral induction loop

Large vandal resistant call button

Call progress LED

Speaker and microphone, with independently adjustable audio output

Mounts in flush or surface mild steel back box

Anti-tamper fixings

Compatible with compact, standard and combined EVCS

Ideal for public places

DISABLED REFUGE EVCS

Folknoll's vandal resistant, **BS 5839-9** compatible, disabled refuge EVCS offers vandal resistant solutions for **MUSEUMS, RAILWAY STATIONS, HOTELS** and other **PUBLIC SPACES**. Our great range of outstations, master stations and control equipment, enables us to construct systems to suit your requirements. All of our products can be customised with photoluminescent, Braille, tactile and multilingual annotation. We can even combine our disabled refuge EVCS with fire telephones, emergency assistance and other building alarms to provide **COST-EFFECTIVE** solutions for smaller sites.

OUTSTATIONS

Disabled refuge EVCS outstations are installed in refuge areas to enable users to call for assistance in the event of an emergency.

RA7700.40/45: OUTSTATION PRO

Our RA7700.40/45 pro-outstation is a bright green refuge outstation with white photoluminescent and Braille annotation, alternative finishes and annotation are available on request. The unit is fitted with a large vandal resistant call button and a call progress LED for user reassurance. The integral speaker volume and microphone gain are independently adjustable to suit the operating environment, with a maximum output of 80dB for noisy areas.

INDUCTION LOOP OPTION

An optional induction loop kit is available to support hearing aid wearers, please specify when ordering.

MOUNTING OPTIONS

The unit can be supplied with a surface or flush mount back box, anti-tamper fixings are available, please specify when ordering.

POWER

The unit is line powered (24Vdc) – with power usually derived from the battery backed system PSU.



APPLICATION

This outstation is suitable for use with our compact, combined and standard Disabled Refuge EVCS.

SPECIFICATIONS

Faceplate:	Bright green with white photoluminescent and Braille annotation
Dimensions:	Width: 140mm, height: 310mm (approx.)
Mounting .RA 7700.40:	Mild steel, surface mount back box
Mounting .RA 7700.45:	Mild steel, flush mount back box
LED:	Red LED call progress indicator
Audio output:	Adjustable (max: 80dB)
Power:	24Vdc (usually line powered from the battery backed system PSU)

CONNECTIONS

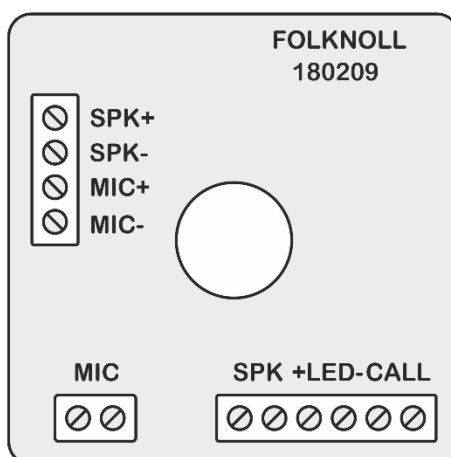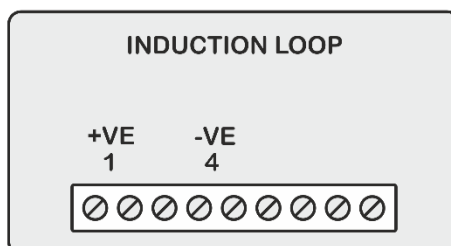

ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual annotation, custom engraving and special finishes for all of our equipment.

GET IN TOUCH

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.