



VANDAL RESISTANT EVC OUTSTATION WITH HEARING AID INDUCTION LOOP

Tough, stainless steel, faceplate

Large, vandal resistant, call button

Call progress LED

Speaker and microphone, with high audio output (up to 80dB)

Mounts in flush or surface, mild steel back box

Anti-tamper fixings available

Compatible with standard, compact and combined Folknoll EVCS

Designed for public use

DISABLED REFUGE EVCS

Folknoll's vandal resistant, **BS 5839-9** compatible, disabled refuge EVCS offers vandal resistant solutions for **MUSEUMS, RAILWAY STATIONS, HOTELS** and other **PUBLIC SPACES**. Our great range of outstations, master stations and control equipment, enables us to construct systems to suit your requirements. All of our products can be customised with photoluminescent, Braille, tactile and multilingual annotation. We can even combine our disabled refuge EVCS with fire telephones, emergency assistance and other building alarms to provide **COST-EFFECTIVE** solutions for smaller sites.

OUTSTATIONS

Disabled refuge EVCS outstations are installed in refuge areas to enable users to call for assistance in the event of an emergency.

RA7700.43/47: OUTSTATION, INDUCTION LOOP

The RA7700.43/47 is a vandal resistant disabled refuge EVCS outstation with an integral induction loop to assist hearing aid users. The unit is fitted with large vandal resistant call button and a call progress LED for user reassurance. The speaker volume and microphone gain are independently adjustable to suit the operating environment, with a maximum output of 80dB for noisy areas. The standard faceplate is made from brushed finish stainless steel and annotated in black with the words **Press Once to Call**, alternative finishes and annotation are available on request.

MOUNTING

This unit is usually supplied with a flush or surface mount mild steel back box (please order RA7700.43 for surface mount or RA7700.47 for flush mount).

POWER

This outstation is usually directly powered from a Folknoll standard system EVC controller or Folknoll compact system master station.



APPLICATION

This outstation is suitable for use with standard, compact and combined Folknoll Disabled Refuge EVCS.

SPECIFICATIONS

Call button	Large, vandal resistant, push button (other buttons by request)
LED:	Separate, red LED, call progress indicator (other colours by request)
Audio output:	Adjustable (max: 80dB)
Input voltage:	24Vdc (usually line powered)
Faceplate:	Stainless steel, brushed finish
Dimensions:	Width: 160mm, height: 330mm (approx.)
Mounting RA7700.40:	Mild steel, back box, surface mount
Mounting RA7700.45:	Mild steel, back box, flush mount

CONNECTIONS

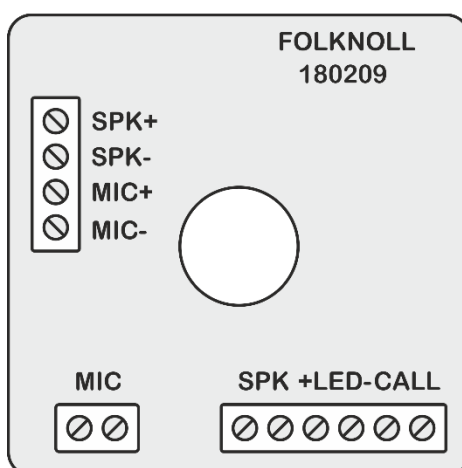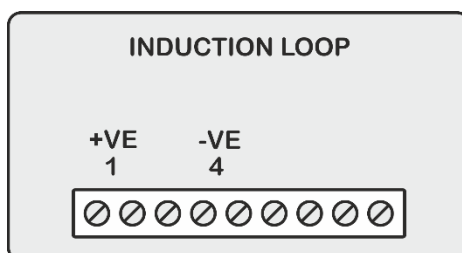

ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual annotation, custom engraving and special finishes for all of our equipment.

GET IN TOUCH

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.



Folknoll Group Ltd

19 Old North Rd, Royston, HERTS, SG8 5DT, UK

www.folknoll.co.uk

+44 (0) 1763 234567

enquiries@folknoll.co.uk