



### VANDAL RESISTANT ACKNOWLEDGE BUTTON

BS 8300-2 and document M compatible

Simple push to acknowledge operation

Button illumination indicates alarm state - for user reassurance

Tough, stainless-steel, construction

Suitable for mounting in a standard UK 35mm single gang back box

Anti-tamper fixings available

Compatible with Folknoll emergency assistance systems

## EMERGENCY ASSISTANCE ALARMS

Folknoll emergency assistance alarm systems offer cost-effective, vandal resistant, **BS 8300-2** and **DOCUMENT M** compatible solutions built from standard and bespoke units. Our alarms can be combined with disabled refuge EVC, fire telephone and other systems. Ideal for **SHOPS, OFFICES, HOTELS** and other **PUBLIC SPACES**.

## ACKNOWLEDGE BUTTONS

Folknoll acknowledge buttons initiate a timed acknowledge function. Alarm sounders will be muted and beacons will be continuously illuminated. Reassuring users that help is on the way and facilitating voice communication. The acknowledge state persists for the preconfigured period (usually 2 minutes). If the alarm is not reset within this period the alarm will be reactivated. Local beacons and sounders will flash and id present remote monitoring devices will be informed.

## DT7520.21F: ACKNOWLEDGE, STAINLESS

Our DT7520.21F offers a vandal resistant acknowledge point with an illuminated button. The faceplate is made from brushed finish stainless steel and annotated in black with the word **ACKNOWLEDGE**. Other finishes and alternative annotation are available on request.

## BUTTON ILLUMINATION

The button illumination indicates the alarm state providing visual reassurance to the operator. The illumination mimics the action of the over-door beacon, which depends of the type of alarm control system used. Typically, the button illumination is off when quiescent, flashing on alarm and illuminated during the acknowledged timeout.

## BUTTON ACTIVATION DELAY

To reduce the risk of an accidental 'alarm acknowledge', the acknowledge button must be held for a minimum of 0.25 seconds.

## MOUNTING

This unit is suitable for mounting in a standard UK, 35mm, single gang, back box (not supplied).

## POWER

12Vdc/24Vdc usually derived powered from a battery backed local or system PSU.


## APPLICATION

Acknowledge buttons are usually installed outside of an alarm zone; for use by staff responding to an alarm.

### SPECIFICATIONS

- Faceplate: Stainless steel, brushed finish, black annotation
- Mounting: Standard UK 35mm single gang back box (not supplied)
- Dimensions: Width: 86mm, height: 86mm, depth: < 35mm (approx.)
- Power: 12Vdc / 24Vdc (Usually supplied from battery backed system PSU)

### CONNECTIONS

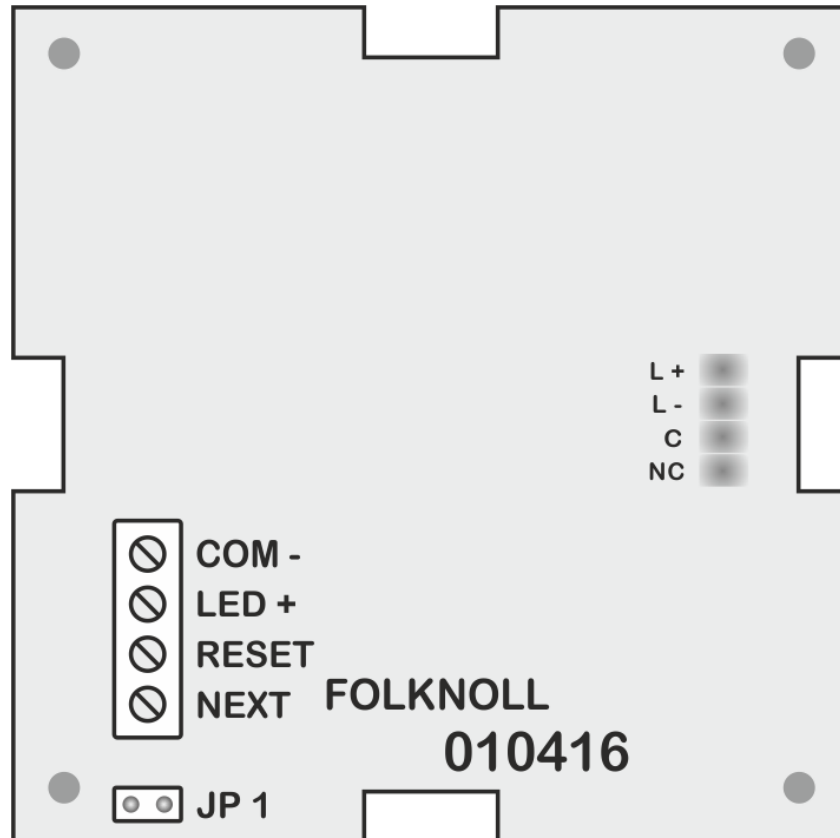

### ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual annotation, custom engraving and special finishes for all of our equipment.

### GET IN TOUCH

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.