



WATER RESISTANT ALARM CALL POINT WITH GASKET

Tough, stainless-steel construction

Suitable for flush mounting in standard UK 35mm single gang back box

Red reassurance LED

Choice of button colours

Ideal for showers, bathrooms, pool areas, etc.

Compatible with all Folknoll emergency assistance systems

EMERGENCY ASSISTANCE ALARMS

Folknoll emergency assistance alarm systems offer cost-effective, vandal resistant, **BS 8300-2** and **DOCUMENT M** compliant solutions built from standard and bespoke units. Our alarms can be combined with disabled refuge EVC, fire telephone and other systems. Ideal for **SHOPS, OFFICES, HOTELS** and other **PUBLIC SPACES**.

CALL POINTS

Call points, pull cords and alarm strips are used to call for assistance in emergency. These units are mounted in strategic locations in accordance with current standards, enabling distressed persons to activate alarms. Depending on the system configuration, beacons, sounders and remote monitoring units will be used to alert staff and others to respond to incidents.

DT 7800-135: CALL POINT, IP66, STAINLESS

Our DT 7800-135 offers a water-resistant alarm call button with reassurance LED. The faceplate is made from brushed finish stainless steel and annotated in red with a bell symbol. Other finishes and alternative annotation are available on request.

CALL BUTTON

The call button is a large, tough, finger or palm operated 'strike' button. The unit is usually supplied with a black call button, other colours are available on request.

ACTIVATION DELAY

Our emergency assistance alarm systems have a built-in activation delay of 0.25 seconds to reduce the risk of accidental calls. The call button must be held down for a fraction of second to activate an alarm.

REASSURANCE INDICATOR

The front panel is fitted with a red reassurance LED whose behaviour depends on the type of control system used. Typically, the LED illuminates on alarm or flashes on alarm and illuminates when acknowledged.

MOUNTING

This unit can be mounted in a standard UK, 35mm, flush, single gang, back box (not supplied).

POWER

The unit is low voltage (12Vdc / 24Vdc) – suitable for 'wet' environments. Power is usually derived from a battery backed system PSU.

APPLICATION


Ideal for wet locations showers, bathrooms, gyms, pool areas, etc. Suitable for use with Folknoll emergency assistance alarm systems

IF MOUNTED ON AN UNEVEN SURFACE THE FACEPLATE MUST BE SEALED WITH A WATERPROOF SEALANT

SPECIFICATIONS

Enclosure:	Brushed finish stainless steel, with black annotation
Dimensions:	Width: 86mm, height: 86mm, depth: < 35mm (approx.)
Mounting:	Standard UK, 35mm, single gang, back box (not supplied)
Button:	Large 'strike' button (choice of colours)
Indicator:	Red reassurance LED
Ingress protection:	IP66
Power:	12Vdc / 24Vdc - Specify when ordering (Usually supplied from battery backed system PSU)

CONNECTIONS

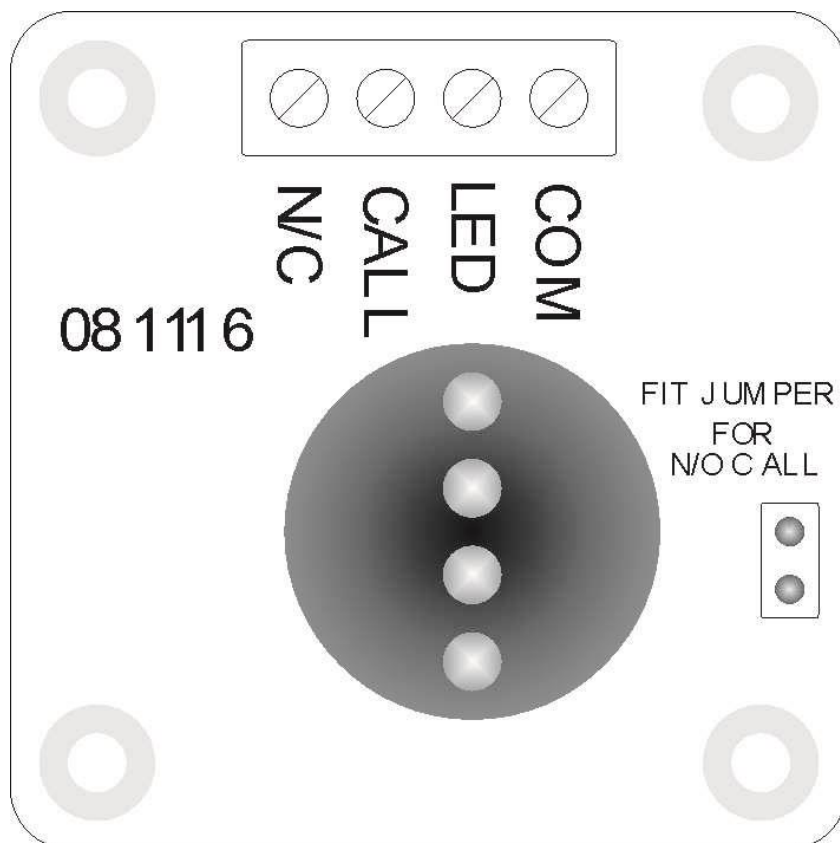

ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual annotation, custom engraving and special finishes for all of our equipment.

GET IN TOUCH

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.