

**ALARM INDICATOR PANEL FOR UP TO 4 ALARMS****BS 8300-2 compliant****Alerts responders to system alarms and faults****4-off bright 20mm dome LED beacons
(can be seen from the side)****Integral sounder****Vandal resistant, stainless steel, construction****Mounts in a UK 35mm, double gang, back box****Suitable for use in public areas****EMERGENCY ASSISTANCE ALARMS**

Folknoll emergency assistance alarm systems offer cost-effective, vandal resistant, **BS 8300-2** and **DOCUMENT M** compliant solutions built from standard and bespoke units. Our alarms can be combined with disabled refuge EVC, fire telephone and other systems. Ideal for **SHOPS, OFFICES, HOTELS** and other **PUBLIC SPACES**.

ALARM INDICATOR PANELS

Alarm indicator panels are installed in permanently staffed locations, e.g. receptions or security control rooms, to indicate alarm activation. If required, Folknoll panels can be daisy-chained to provide alarm indication in multiple locations.

DT7550.04: LED INDICATOR PANEL 4-ZONE

LED indicator panels provide cost-effective alternatives to 'intelligent' LCD indicator panels.

The DT7550.04 LED Indicator Panel 4-Zone monitors and annunciates alarms from up to 4-off zones.

The indicator panel is fitted with a sounder to alert staff and 4-off dome LEDs to indicate alarm source. Dome LEDs can be seen from the side and are suitable for use in corridors and other locations where the unit may not be approached or observed from the front.

The standard faceplate is annotated in black with the words **ZONES 1 2 3 4**. Alternative annotation is available on request.

This panel is suitable for mounting in a standard UK, 35mm, double gang, back box.

STANDARD ALARM ZONES

This unit can monitor up to 4 standard emergency assistance alarms zones.

ALARM ZONES WITH FAULT MONITORING

Alternatively, this unit can monitor up to 2 emergency assistance alarms zones with fault monitoring.

NO RESET FUNCTION

Remote indicator panels cannot usually be used to reset alarms.

Emergency assistance alarms can only be reset at the local 'reset unit' to ensure staff attendance to alarms.


APPLICATION

This unit is designed for mounting in permanently staffed areas to alert staff to emergency assistance alarms and faults, e.g. hotel receptions and building security rooms.

SPECIFICATIONS

Faceplate:	Brush finished stainless steel, with black annotation
Mounting:	Surface or flush mount, anti-tamper fixings available
Back box surface:	Standard UK 35mm double gang back box (not supplied)
Back box flush:	Standard UK 35mm double gang back box (not supplied)
Dimensions:	Width: 146 mm, height: 86 mm, depth: < 35mm (approx.)
Display:	4-off 20mm dome LED
Audible Alert:	Integral sounder
Power:	12Vdc / 24Vdc (Usually supplied from battery backed system PSU)

CONNECTIONS

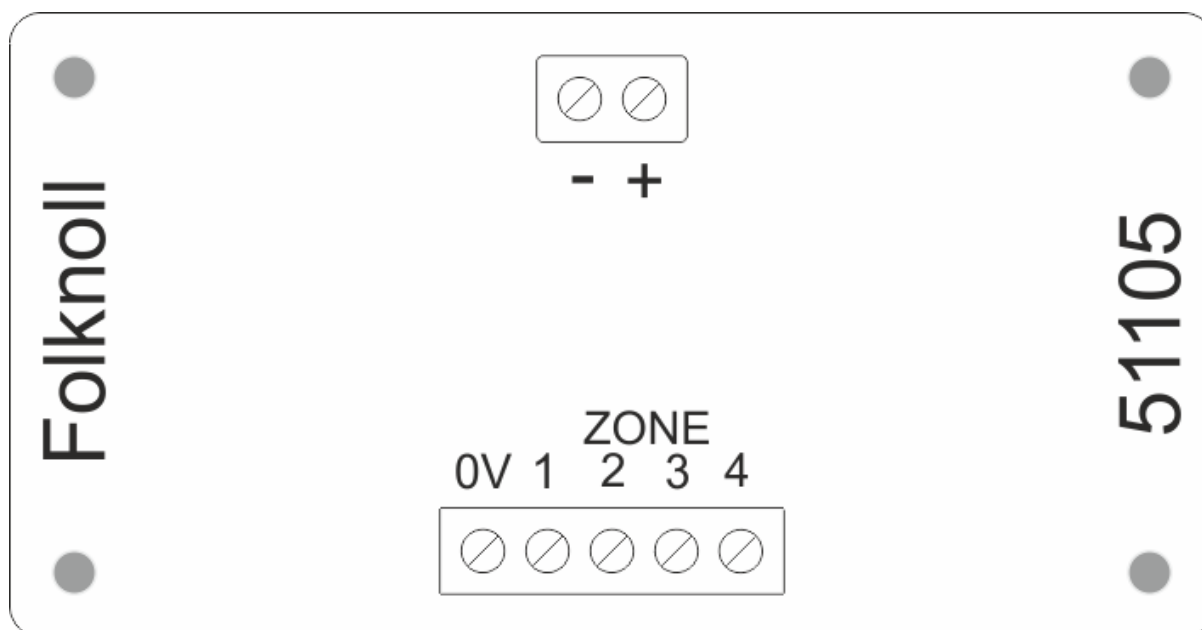

ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual annotation, custom engraving and special finishes for all of our equipment.

GET IN TOUCH

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.



Folknoll Group Ltd

Old North Rd, Royston, HERTS, SG8 5DT, UK

www.folknoll.co.uk

+44 (0) 1763 234567

enquiries@folknoll.co.uk