



ALARM INDICATOR PANEL FOR UP TO 256 ALARMS

BS 8300 and document M compliant

Alerts responders to system alarms and faults

16-character LCD display

Acknowledge button

Integral sounder

Output for auxiliary beacons / sounders

Vandal resistant, stainless steel, construction

Flush or surface mount, anti-tamper fixings available

Suitable for use in public areas

EMERGENCY ASSISTANCE ALARMS

Folknoll emergency assistance alarm systems offer cost-effective, vandal resistant, **BS 8300** and **DOCUMENT M** compliant solutions built from standard and bespoke units. Our alarms can be combined with disabled refuge EVC, fire telephone and other systems. Ideal for **SHOPS, OFFICES, HOTELS AND OTHER PUBLIC SPACES**.

ALARM INDICATOR PANELS

Alarm indicator panels are installed in permanently staffed locations, e.g. receptions or security control rooms, to indicate alarm activation. If required, Folknoll panels can be daisy-chained to provide alarm indication in multiple locations.

DT7550.81A: LCD INDICATOR PANEL

Our DT7550.81A LCD Indicator Panel comprises a stainless steel, faceplate and control board with a 16-character LCD display, an integral sounder and an acknowledge button. The faceplate is annotated in black with the word **ACKNOWLEDGE**. Alternative finishes and annotation are available on request. Flush and surface mount steel back boxes can be supplied as required.

STANDARD ALARM ZONES

This unit can monitor up to 256 standard emergency assistance alarms zones.

ALARM ZONES WITH FAULT MONITORING

Alternatively, this unit can monitor up to 128 emergency assistance alarms zones with fault monitoring.

ACKNOWLEDGE FUNCTION

The acknowledge button 'accepts' and temporarily mutes activated alarms, giving reassurance that help is on its way and making verbal communication easier. If an acknowledged alarm is not reset within a pre-set period, i.e. the reset button within the toilet has not been pressed, the alarm is automatically reactivated.

NO RESET FUNCTION

Remote indicator panels cannot usually be used to reset alarms.

Emergency assistance alarms can only be reset at the local 'reset unit' to ensure staff attendance to alarms.


APPLICATION

This unit is designed for mounting in permanently staffed areas to alert staff to emergency assistance alarms and faults, e.g. hotel receptions and building security rooms.

SPECIFICATIONS

Faceplate:	Brushed finish stainless steel with black annotation
Mounting:	Surface or flush mount back box, anti-tamper fixings
Back box surface:	Mild steel, black painted
Back box flush:	Mild steel, galvanised
Dimensions:	Width: 130mm, height: 190mm (approx.)
Display:	16-character LCD
Audible alert:	Integral sounder
Power:	12Vdc / 24Vdc (Usually supplied from battery backed system PSU)

CONNECTIONS

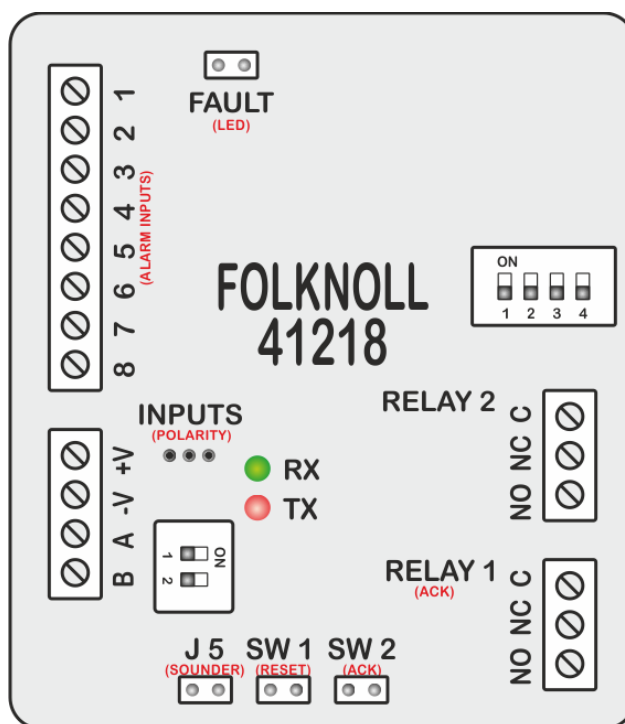

ABOUT FOLKNOLL

We are a UK based systems design, manufacturing and installation company. Since 1975 we have been supplying tough, reliable, practical, alarm and control systems for the private and public sectors. All of our products and systems have been designed for easy installation and low maintenance by experienced engineers. As original manufacturers, all of our products and systems can be customised to suit your requirements. We also offer individual engraving, special finishes and antimicrobial coatings for all of our equipment.

GET IN TOUCH

Please contact us for further information about our wide range of products and services and find out how we can provide a solution for you.



Folknoll Group Ltd

Old North Rd, Royston, HERTS, SG8 5DT, UK

www.folknoll.co.uk

+44 (0) 1763 234567

enquiries@folknoll.co.uk